



PROXXON

STONE AND TILE
TREATMENT

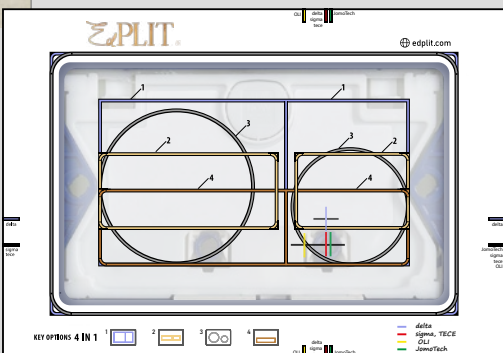

YOUR
**GAME
CHANGER**

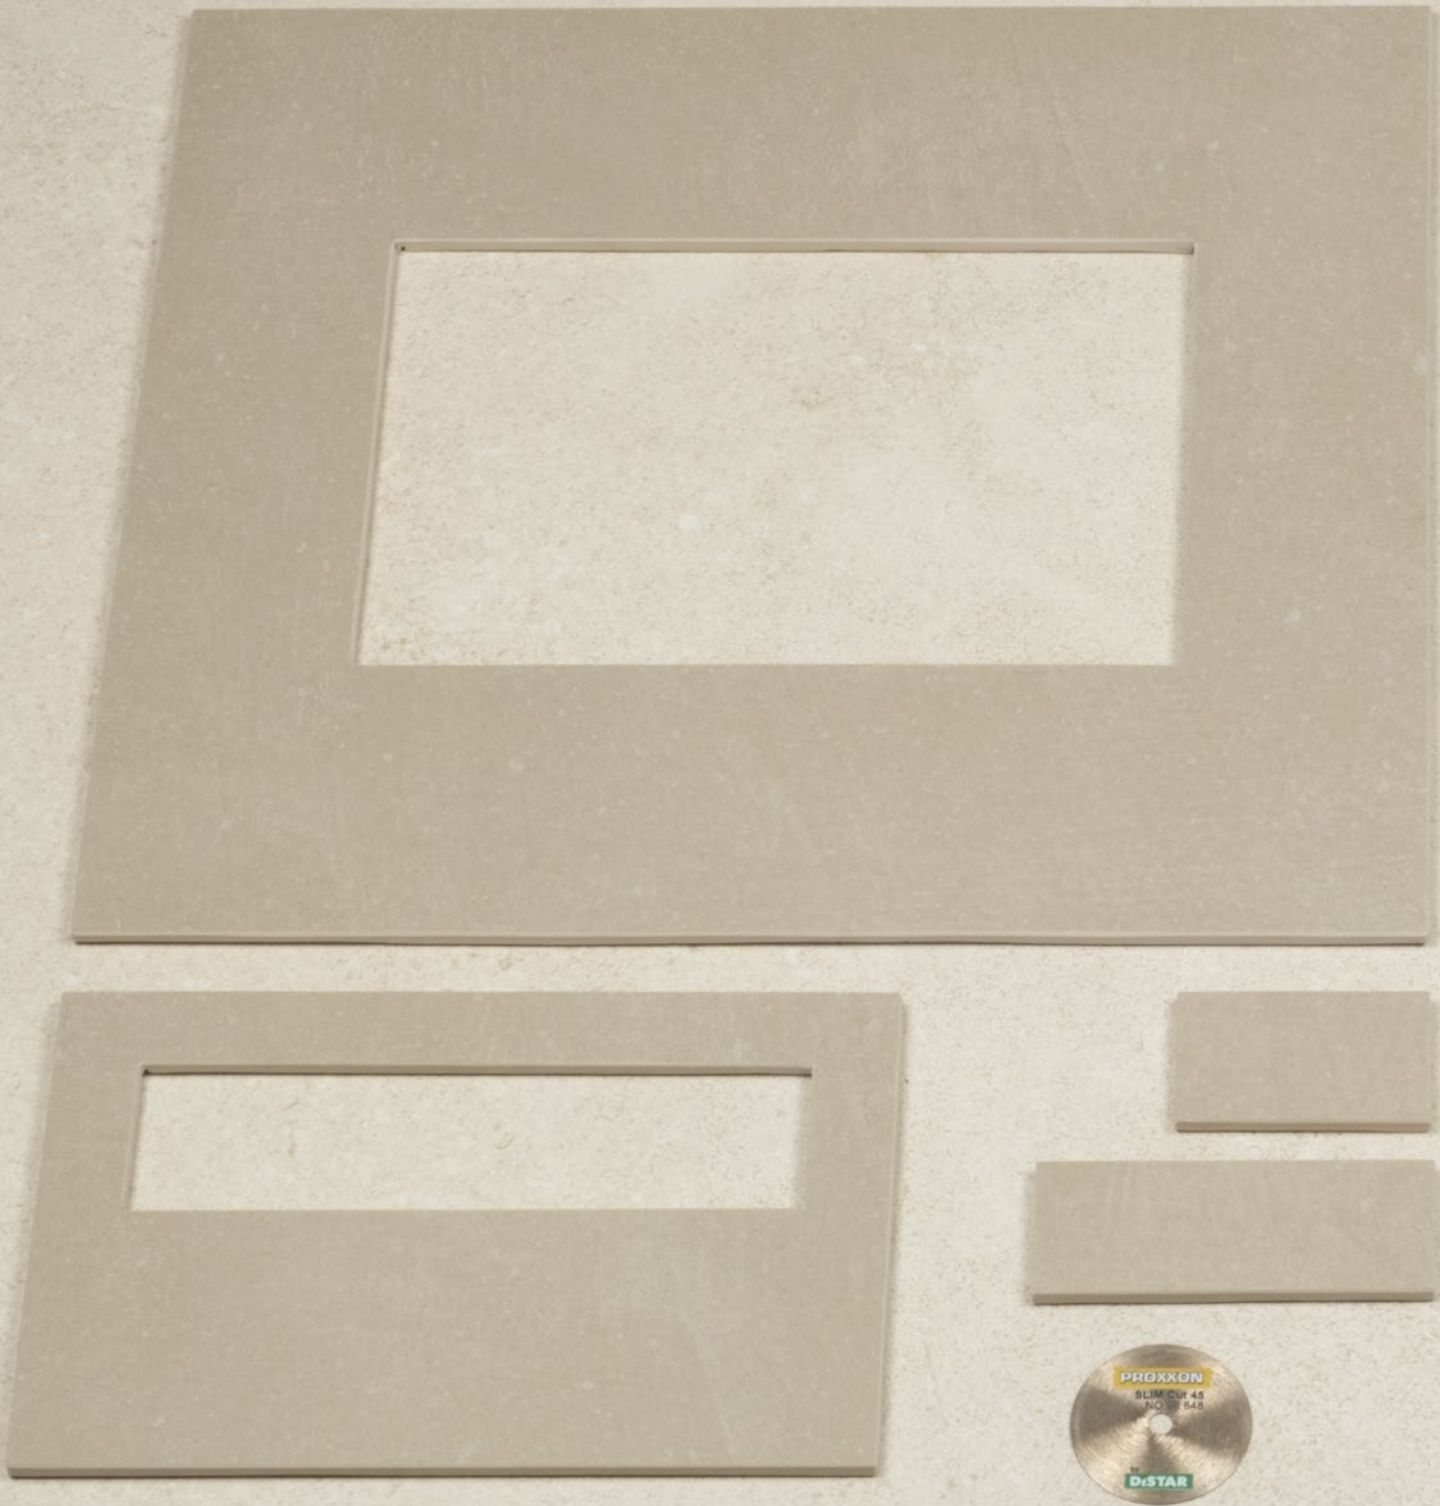

EdPLIT.

Edplit has developed a patented system of flush buttons made of porcelain stoneware, as well as many other minimalist solutions for ventilation, electrical sockets, switches, and accessories.

DiSTAR

Distar is a manufacturer of highest quality diamond cutting tools.



PROXXON

PROXXON manufactures precise, powerful and lightweight power tools, perfectly suited for such applications.

TABLE OF CONTENTS

LONGNECK ANGLE GRINDER LHW	Seite 04
ACCESSORIES LHW	Seite 06
LONGNECK ANGLE MILLING/DRILLING UNIT LWB	Seite 08
ACCESSORIES LWB	Seite 09
ANGLE POLISHER WP	Seite 10
CORDLESS HOT GLUE GUN HKP/A	Seite 11
BASIC SET LBX/A + LBX/TL3	Seite 12
EXTRACTION UNIT ASA	Seite 14
WORKSHOP VACUUM-CLEANER WSA	Seite 15



BRUSHLESS

LONGNECK

Longneck angle grinder

For precise cutting right into corners with a cutting depth of 14mm.
Unsurpassed versatility thanks to longneck gear head made of die-cast aluminum.

Description

Technical data

NO

LHW	 230 V  100 W  16.000 ^{max}  CASE	28 547
LHW/BL BRUSHLESS	 230 V  250 W  16.000 ^{max}  BOX	29 202
LHW/A	 10.8 V  2,5 Ah  16.000 ^{max}  CASE	29 815
LHW/A Solo (without battery and charger)	 10.8 V  16.000 ^{max}  BOX	29 817
Longneck-Set BRUSHLESS LHW/BL and LWB/BL in L-BOXX 102.	 230 V  250 W  16.000 ^{max}  BOX	29 290




Longneck angle grinder LHW/BL BRUSHLESS

Brushless motors and advanced power electronics:
maximum performance in a compact design!


NO 29 202

Patented
angle gear box

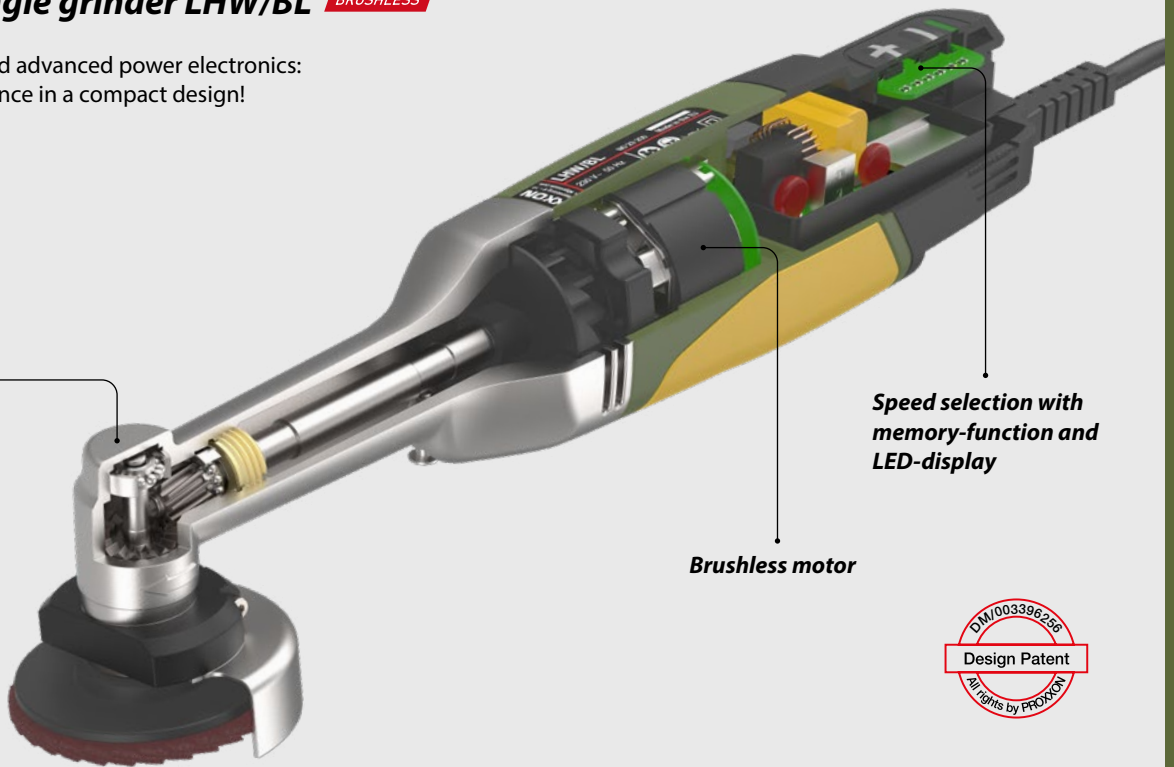

Speed selection with
memory-function and
LED-display

Brushless motor



LONGNECK LHW

Longneck-Set BRUSHLESS

The performance duo for tile contractors!

The two longneck models LHW/BL and LWB/BL in
proven L-BOXX system. With a high-quality form
insert. Plenty of space for accessories.


NO 29 290



NO 29 817
(without battery
and charger)

Longneck angle grinder LHW/A

NO 29 815



LHW/A Solo

Without battery and charger
in cardboard box.

NO 29 817




LHW/A

Comes with battery and
charger in a practical
case.

NO 29 815



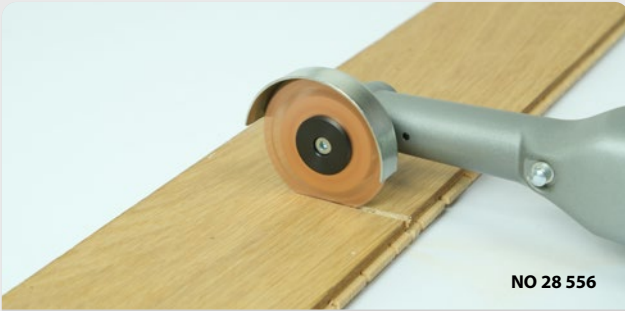

Tungsten carbide cutting disc

For cutting wood (flooring, door frames, skirting boards), joint mortar and plaster. Drilled holes for improved cooling and visibility. Thickness 1.3 mm.



NO 28 556



Tungsten carbide rasp- and cutting disc

For working on wood (floors, door frames, skirting boards), grout and plaster. Holes for better cooling and visibility. Thickness 3.0 mm.

NO 28 559

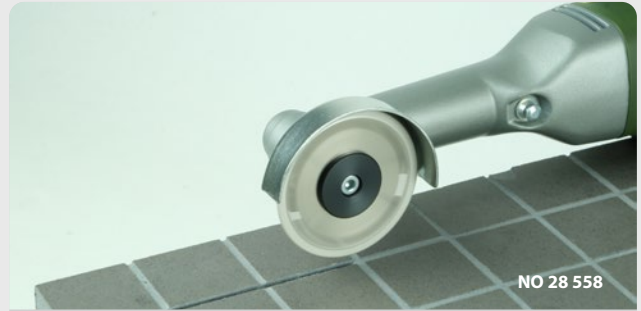

Diamond-coated cutting disc

For fast cutting and thin grout removal in porcelain stoneware, natural stone (granite, marble), joint mortar, ceramic materials, glass. Holes for better cooling and visibility. Thickness 1.2 mm.

NO 28 558



Diamond-coated roughing disc

For grinding and profiling, grout removal. For tiles, grout, glass. Holes for better cooling and visibility. Thickness 2.1 mm.

NO 28 557



Cutting disc with Diamond Turbo Rim

For very fast, rough cuts in natural stone (granite, marble), porcelain stoneware and ceramic materials. Thickness 1.7 mm.

NO 28 157



Diamond-coated fine cutting disc

Thin, clean cuts in ceramic materials, glass. Holes for better cooling and visibility. Thickness 0.8 mm.


NO 28 158



Corundum bound cutting disc

For cutting steel and non-ferrous metals. Woven reinforcement. Thickness 1,0 mm. Ø 50 mm. 5 pieces.


NO 28 155

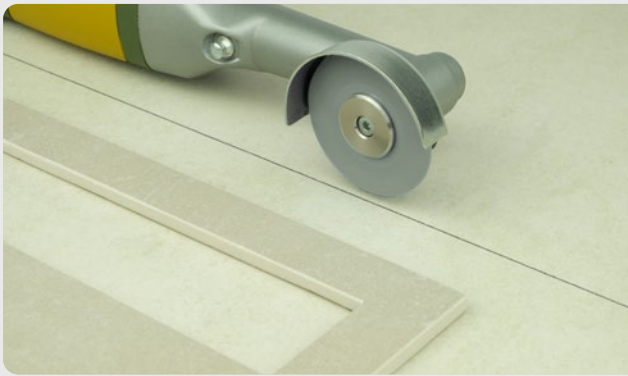

Diamond-coated cutting disc UNI Cut 50

Fast, thin, clean cuts. All-rounder. For porcelain stoneware, natural stone (granite, marble), ceramic materials, glass. With surface diamond coating (10 mm). Thickness 0.9 mm.


NO 28 156

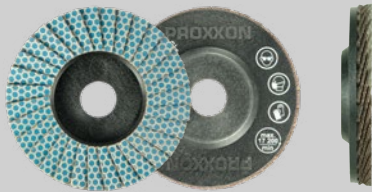

Diamond-coated flap discs

Sanding of cutting edges, breaking of edges and creation of clean chamfers in porcelain stoneware, natural stone (granite, marble), ceramic materials and glass. Optimised tool geometry for perfect corner sanding. Ø 50 mm. 2 pieces.

- NO 28 166** Grit 60
- NO 28 167** Grit 120
- NO 28 168** Grit 200

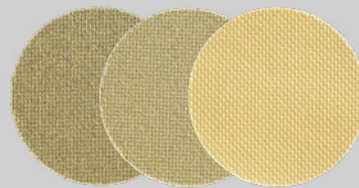

Diamond sanding discs

For sanding and polishing cutting edges and chamfers. Also for breaking edges beforehand and creating clean chamfers. For porcelain stoneware, natural stone (granite, marble), ceramic materials, glass. Self-adhesive.

- NO 28 675** Grit 120
- NO 28 676** Grit 200
- NO 28 677** Grit 400

Precision vice FMZ

Rotates in all directions.

Easily clamps to workbenches and tables of up to 60mm. Alternatively, use 2 standard screws to secure to the work surface. Ball and socket: rotates in all directions (even downwards). 75 mm jaws with protective covers (for delicate workpieces). Maximum clamping width 70 mm and weight 1.6 kg.


NO 28 608



Set of diamond sanding discs

One disc each of grit 60 – 120 – 200 – 400 – 800 – 1500 – 3000. Including one foam backing pad.

NO 28 679

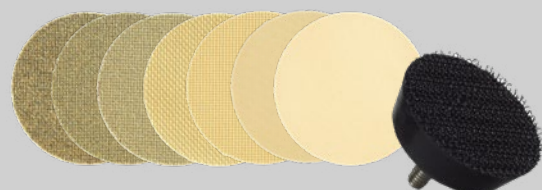


EdPLIT®

LONGNECK LWB

BRUSHLESS

LONGNECK

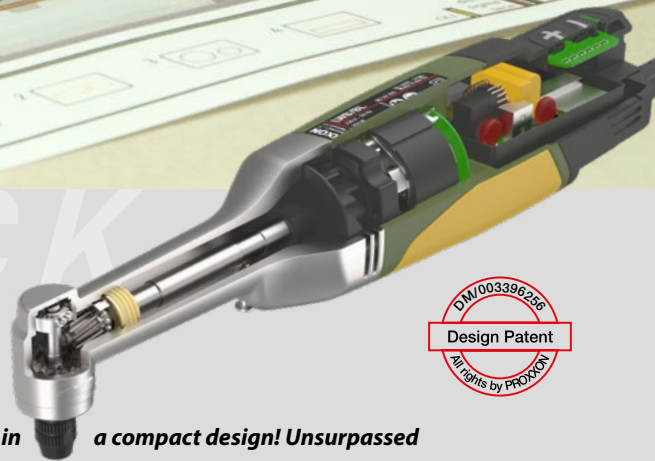

Longneck angle milling/drilling unit

Brushless motors and advanced power electronics: maximum performance in versatility thanks to longneck gear head made of die-cast aluminum. **a compact design! Unsurpassed**

Description

Technical data


NO

LWB/E



28 492

LWB/BL **BRUSHLESS**



29 207

LWB/A



29 805

LWB/A Solo

(without battery and charger)



29 807


Longneck-Set **BRUSHLESS**

LHW/BL and LWB/BL in L-BOXX 102.



29 290



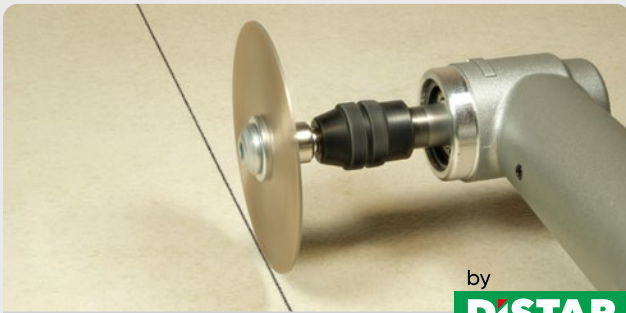

by
DISTAR



Diamond cutting disc SLIM Cut 45

Extremely thin, precise cuts. For sharp edges with almost no chipping. For porcelain stoneware, natural stone (granite, marble), ceramic materials. Thickness 0.6 mm. Shaft 3.2 mm. Ø 45 mm.

NO 28 848



Diamond-coated cutting disc UNI Cut 45

Fast, thin, clean cuts. All-rounder. For porcelain stoneware, natural stone (granite, marble), ceramic materials, glass. With flat diamond coating (10 mm). Thickness 0.9 mm. Shaft 3.2 mm. Ø 45 mm.


NO 28 849



Diamond-coated cutting discs

Extremely thin, precise cuts in porcelain stoneware, ceramic materials, glass, natural stone. With flat diamond coating. Holes for better cooling. Thickness 0.6 mm. Shank 2.35 mm.


NO 28 846



Diamond-coated cutting discs

Extremely thin, precise cuts in ceramic materials, glass, natural stone. Thickness 0.6 mm. Shaft 2.35 mm.

NO 28 840 Ø 20 mm
NO 28 842 Ø 38 mm

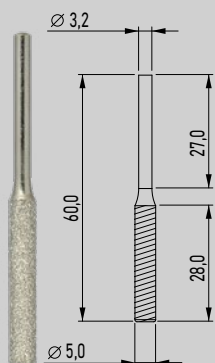

Diamond-coated grinding bits

For grinding radii, e.g. in cut-outs. For porcelain stoneware, natural stone (granite, marble), ceramic materials, glass. Ø 5 mm. Shaft 3.2 mm. 2 pieces.

NO 28 246

Additional tools for working with ceramic materials, glass, porcelain stoneware and natural stone.



Diamond-coated grinding bits in spherical shape

NO 28 226



Ball-shaped diamond-coated grinding bits

NO 28 230 Ø 1,2 mm
NO 28 232 Ø 2,2 mm



Diamond-coated twist drills

NO 28 255



Rasp cutter












For working on gypsum, wood, plastic, tiles. Made of carbide.


NO 28 757



Angle polisher WP

Quiet planetary gear in diecast aluminium housing and continuously variable speed control for low and constant speeds even during high contact pressure. Foam backing pad Ø 50 mm with hook and loop fastening.


Description	Technical data	NO
WP/E	 230 V  100 W  2.800  CASE	28 660
WP/A	 10.8 V  2,5 Ah  2.800  CASE	29 820
WP/A Solo (without battery and charger)	 10.8 V  2.800  BOX	29 822

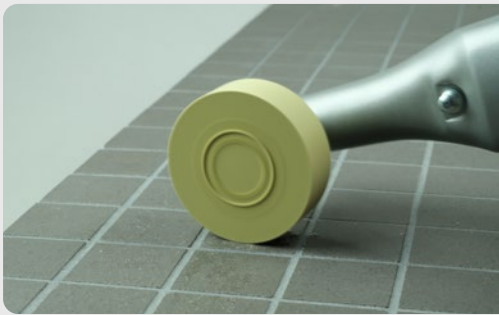

Eraser disc

For removing adhesive residue, markings and other contaminants from ceramic surfaces.

NO 29 068



Diamond sanding/polishing pads

For sanding and polishing cutting of edges and chamfers. Also for breaking edges beforehand and creating clean chamfers. For porcelain stoneware, natural stone (granite, marble), ceramic materials, glass. Self-adhesive.

- NO 28 656** 3 pieces Grit 50
- NO 28 657** 3 pieces Grit 100
- NO 28 658** 3 pieces Grit 200
- NO 28 659** 3 pieces Grit 400

Cordless hot glue gun HKP/A

With electronically controlled temperature (exactly 170°C) and short heat-up time.

Sensitive mechanical feed. Integrated stand mechanism. The operating time of the 2 Ah battery is sufficient even for larger projects. The USB charger 2.1A (included) charges the battery in about one hour.

Technical data:

3.6 V. 2 Ah. 170 °C. Weight 200 g.
4 sticks 7 x 100 mm are included.

NO 28 190



Glue sticks for HKP/A

Ø 7mm. Length 100mm. Colourless.

NO 28 194

Basic-Set LBX/A

Professional starter set with two Li/A2 batteries and one LG/A2 charger.

In proven L-BOXX-system. With thermoformed insert for two cordless tools.
For a customised selection of two cordless tools for applications such as stone and tile treatment, metal construction, for the automotive sector, car body shops, welding, interior work or maintenance.
Plenty of space for accessories.

Technical data:

Rapid charger 100 - 240 V.
50/60 Hz. Output 12.6 V, 2 A.
Weight 340 g. Battery 10.8 V. 2.5 Ah.
Length 85 mm. Weight 180 g.

NO 29 900



Lithium-ion battery Li/A2

For powerful operation of our MICROMOT cordless tools.
With integrated temperature control for safe operation.

Technical data:

10,8 V. 2,5 Ah. Length 85 mm. Weight 180 g.

NO 29 896

Rapid battery charger LG/A2

Recommended for charging the lithium-ion battery Li/A2.
Also compatible with the Tabless battery Li/TL3. Integrated temperature monitoring.

Technical data:

Input 100 - 240 V, 50/60 Hz.
Output 12.6 V, 2 A. Weight approx. 340 g.

NO 29 880





Basic-Set LBX/TL3

Professional starter set with two Li/TL3 batteries and SuperCharger SC.

In proven L-BOXX-system. With thermoformed insert for two cordless tools. For a customised selection of two cordless tools for applications such as stone and tile treatment, metal construction, for the automotive sector, car body shops, welding, interior work or maintenance. Plenty of space for accessories.

Technical data:

SuperCharger SC 240 V. 50/60 Hz.
Output 12.6 V, 8 A. Weight 380 g.
Battery 10.8 V. 3.0 Ah.
Length 85 mm. Weight 180 g.

NO 29 905



BASIC SET LBX/TL3



Lithium-ion battery Li/TL3

High-performance battery with tabless technology for the most demanding applications.

Particularly suitable for energy-intensive tools such as LHW/A. Designed for high charging currents and therefore short charging times. Reaches approximately 95% of its capacity in the SuperCharger SC after around 15 minutes. Increased efficiency thanks to reduced heat loss and delayed safety shutdown in the event of overheating.

Technical data:

10,8 V. 3,0 Ah. Length 85 mm. Weight 180 g.

NO 29 894

SuperCharger SC

For lightning-fast charging!

Charges the Tabless Li/TL3 battery from 0 to approximately 95% of its capacity in around 15 minutes. With active cooling and intelligent temperature monitoring. Housing prepared for wall mounting. Not compatible with the Li/A2 battery.

Technical data:

240 V. 50/60 Hz.
Output 12,6 V, 8 A. Weight 380 g.

NO 29 882



Extraction unit ASA

Powerful fan for effective air flow. Also for indoor air purification.

Efficient filtration of dust, chips, vapours and smoke as well as pollen, bacteria, viruses, spores and odours. Three-stage filter system: pre-filter for separating coarse particles. High-quality main filter according to class HEPA 13 and active carbon filter. Easy filter change. Complete with power supply unit and 2 pre-filters, 2 main filters and 2 activated carbon filters.


Technical data:


230 V. 50/60 Hz. 30 W.
Size 260 x 200 x 150mm.

NO 27 520



EXTRACTION UNIT ASA

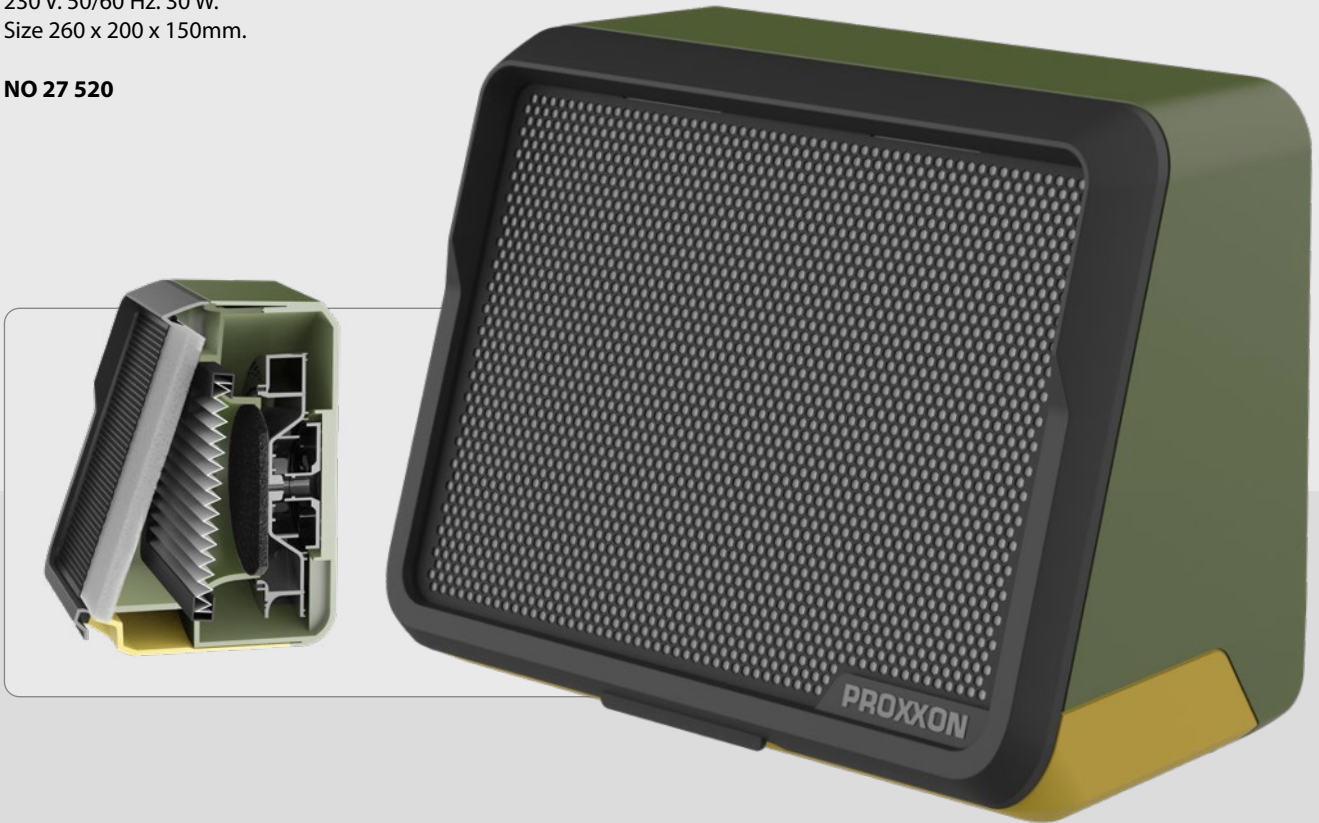

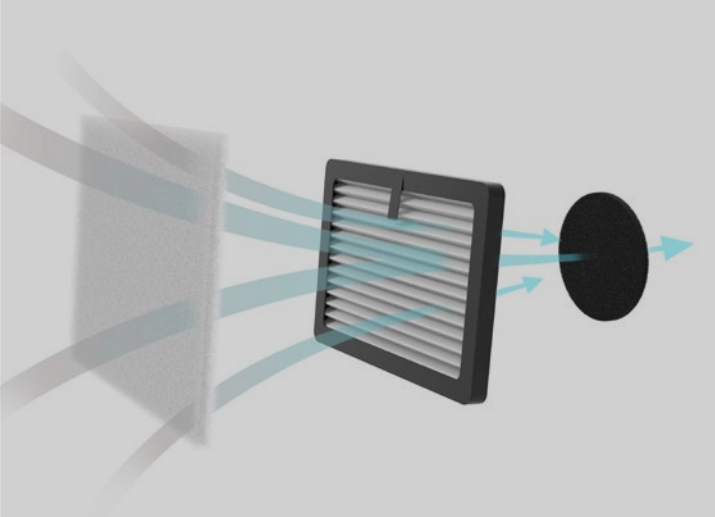

Main filter set

Consisting of main filter according to filter class HEPA 13 with filtration efficiency > 99.95 %. Including activated carbon filter. One piece each.

NO 27 522

Pre-filter

For separating coarse particles.
2 pieces.

NO 27 524



Automatic workshop vacuum-cleaner WSA

Highly efficient dry vacuum technology: powerful suction, whisper-quiet and energy-saving.

For dust-free working: switchable automatic mode for direct connection of power tools. With 5-second follow-up time. Large foot switch for convenient operation. With electronic power control. High-quality fleece filter bags according to filter class HEPA 13 with filtration efficiency > 99.95 %. Always tidy: six slots for accessories and lockable cable hook for mains cable. The appliance lid with motor unit can be removed for easy emptying of the container.

Complete with antistatic suction hose, two aluminium suction tubes, floor nozzle, crevice nozzle with brush ring, filter basket, fleece filter bag and suction adapter for PROXXON devices (can also be clamped in a vice).

Technical data:

230 V. 50/60 Hz. Maximum pressure difference 210 mbar.

700 W. For power tools up to 1,800 W.

Weight 4.3 kg. Protective insulation as per class 1.

Capacity of the container 11l.

NO 27 500



Fleece filter bags

According to filter class HEPA 13 with filtration efficiency > 99.95 %.
5 pieces.

NO 27 502



PROXXON



PROXXON GmbH • Industriepark Region Trier • Dieselstraße 3–7 • DE-54343 Föhren
Telefon: 0 65 02 - 93 17-0 • E-Mail: export@proxxon.com • www.proxxon.com

Errors and misprints excepted.

NO 95 144 EN